

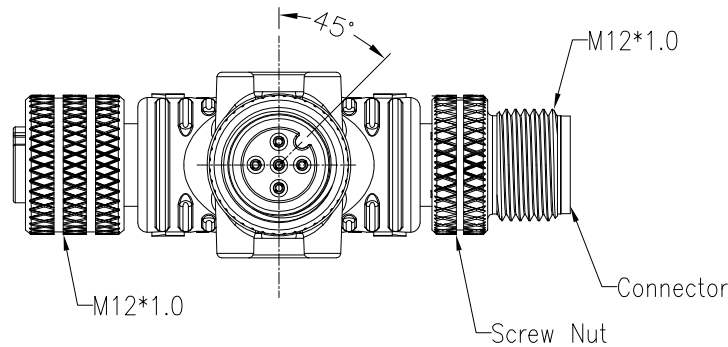
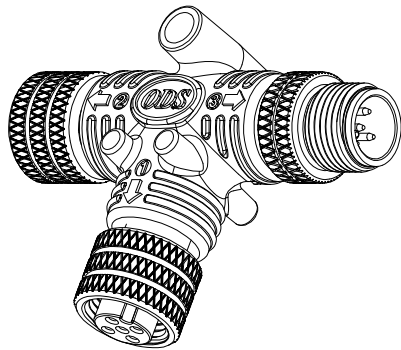
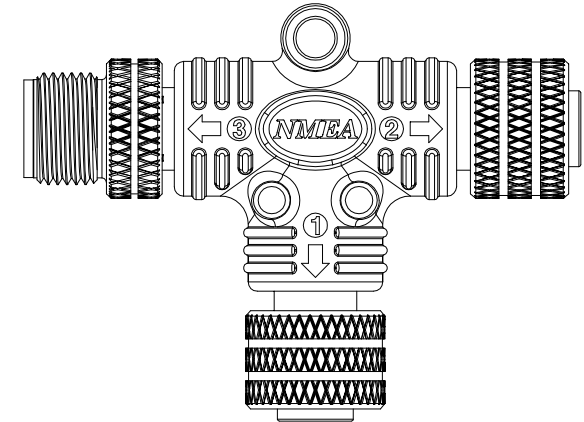
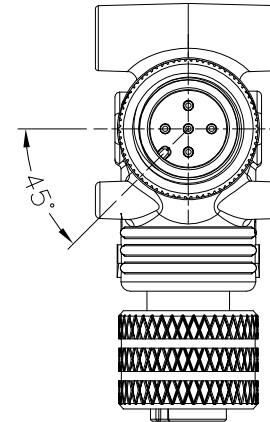
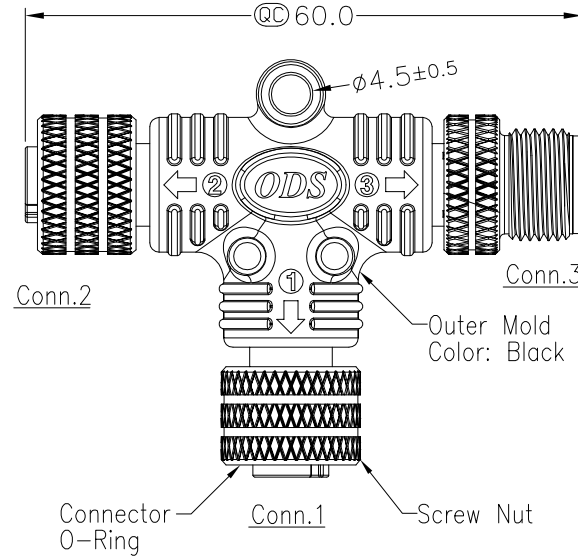


REV. A	ECN NO.	DATE 2016/01/18	SIGN Nancy	DESCRIPTION Change Rev 05 To Issue Rev A

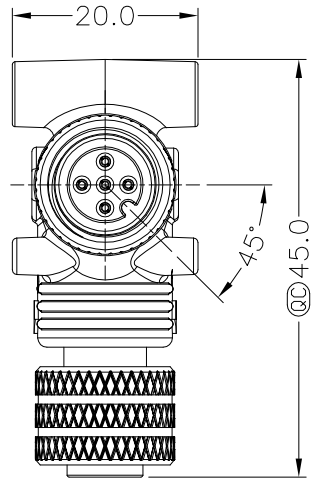


Note:

- Waterproof Rate: IP67
(No Ingress of Dust/ Protected Against Harmful Effects Caused In 1 Meter Water Within 30 Minutes)
- Temperature Range: -20°C to +80°C
- Current Rating: 5A
- Material:
Housing: Nylon, Black
Pin: Copper Alloy, 30u" Gold Plated
Screw Nut: Brass, Nickel Plated



Conn.1, 2
Pin Assignments Front View



Conn.3
Pin Assignments Front View

5		
4		
3		
2		
1		
Conn.1	Conn.2	Conn.3
Pin Out		

ODS 歐德斯電通科技股份有限公司

TITLE NMEA,MICRO-C,TEE ADAPTOR				
QC : QC check		DSGN. Reg	PART NO. NAT-MM1MF1MF1001	
TOLERANCE	±0.50	SCALE 1 : 1	DWN. Nancy	DATE 2016/01/18
	UNIT: mm	SIZE A4	CHKD. Miller	DATE 2016/01/18
	SHEET 1 of 1	REV. A	APVD. Reg	DATE 2016/01/18